



Professional Wireless







Frequency Agile UHF AutoScan Wireless Real. Reliable. Professional.

The next step in Ansr Audio's 700 channel wireless line brings professional features together with dependability and ease of use to deliver a system designed to satisfy experts and first-time users alike.

The 700 FCC-safe UHF frequencies span six television channels (40 - 45) to provide the installer maximum flexibility of operation. AutoScan channel selection finds the next open frequency to allow the Scan700 to easily fit into any install environment. In addition, the Scan700 includes four groups of eight channel presets. Excluding outside interference, the preset groups provide quick multi-system setup free from channel interaction.


The built-in recharging system eliminates battery cost - simply connect the transmitter to the receiver with the supplied charging cable and the rechargeable batteries are always ready to go.

Available in a variety of packages, the Scan700 provides premium performance and superior sound in any situation.

FEATURES

- 700 FCC-safe UHF frequencies
- AutoScan, manual or preset channel selection
- Built-in recharging system
- RF, audio and battery monitoring
- Front panel volume control
- XLR and 1/4 inch outputs
- Mic / Line output selector
- · Rear panel squelch adjust

COMPONENTS

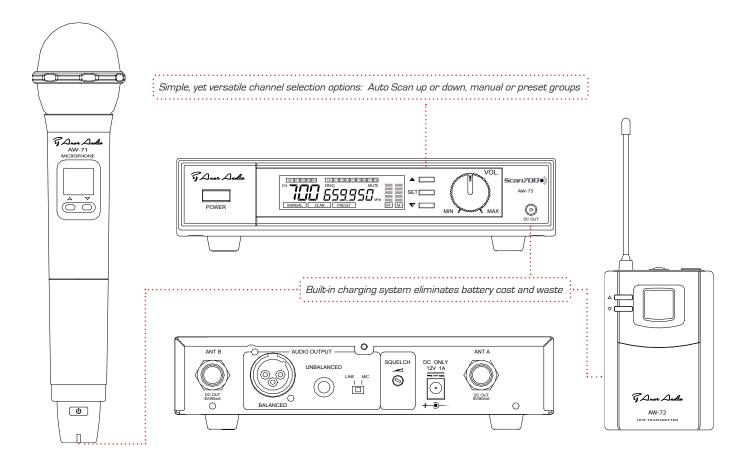

SYSTEMS



AW-7571 Handheld System



AW-7572-14 / 14T Bodypack System with AM-14 Headworn Black or Tan



AW-7572-18 Bodypack System with AM-18 Omnidirectional Premium Lavalier Microphone



AW-7572-11 Bodypack System with AM-11 Lavalier



AW-7572-H20 Bodypack System with SP-H20 headworn and Transmitter Belt



AW-7500 Handheld, Bodypack Combo with AM-11 Omnidirectional Lavalier Microphone



AW-7572-17 / 17T Bodypack System with AM-17 Headworn Black or Tan



AW-7572-19 Bodypack System with AM-19 Cardioid Lavalier Microphone



AW-7572 Bodypack System (no microphone)

SPECIFICATIONS

Operating Frequency Range: 630 - 660 MHz (TV 40-45)
Oscilator: PLL synthesized
Reception: True diversity

Frequency Stability: +/- 0.005%

System Dynamic Range: >96 dB

Signal to Noise: >94 dB
THD: <1% at 1 KHz
Squelch: Tone and audio

Operating Range: Transmitter Power: Outputs:

Transmitter Batteries: Battery Life:

Dimensions (HWD):

Up to 300 feet 10 mW XLR balanced, 2K Ω 1/4 inch unbalanced, 600 Ω (2) AA, rechargeable or alkaline up to 6h rechargeable, 8h alkaline 1.73 x 8.3 x 7.08 in, (half rack)

