

Scan16

Professional Wireless





16 Frequency UHF AutoScan Wireless

Simple. Solid. Dependable.

The next step in Ansr Audio's 16 frequency wireless line brings professional features together with dependability and ease of use to deliver a system that's equally comfortable at entry level or operating along side larger install systems.

The sixteen UHF frequencies span three television channels (49, 50, 51) to provide the installer maximum flexibility of operation. AutoScan channel selection finds the next open frequency to allow the Scan16 to easily fit in to most any install environment.




The built-in recharging system eliminates battery cost - simply connect the transmitter to the receiver with the supplied charging cable and the rechargeable batteries are always ready to go.

Available in a variety of packages, the Scan16 provides premium performance and superior sound in any situation.

FEATURES

- 16 UHF frequencies
- AutoScan channel selection
- Built-in recharging system
- RF and audio monitoring
- Front panel volume control
- XLR and 1/4 inch outputs
- Mic / Line output selector
- Rear panel squelch adjust

COMPONENTS

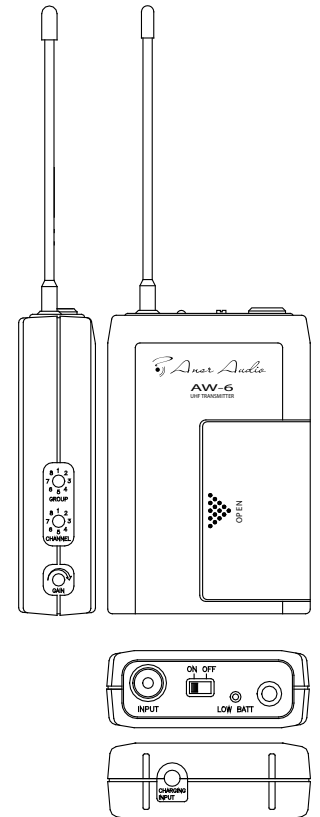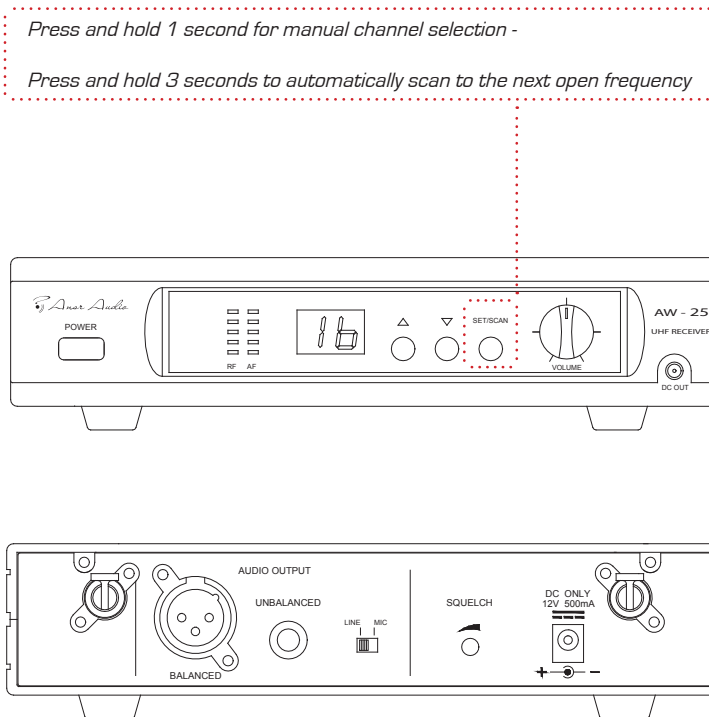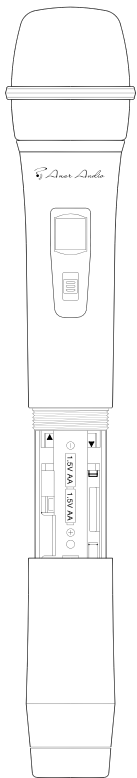

AW-1
Dynamic Handheld Transmitter

AW-25
16 Frequency UHF Receiver

AW-6
Bodypack Transmitter

SYSTEMS



AW-251
Handheld System



AW-256-11
Bodypack System
with AM-11 Lavalier



AW-256-17 / 17T
Bodypack System
with AM-17 Headworn
Black or Tan



AW-256-14 / 14T
Bodypack System
with AM-14 Headworn
Black or Tan



AW-256-H20
Bodypack System
with SP-H20 headworn
and Transmitter Belt



AW-256-19
Bodypack System
with AM-19 Cardioid
Lavalier Microphone



AW-256-18
Bodypack System
with AM-18 Omnidirectional
Premium Lavalier Microphone



AW-2500
Handheld, Bodypack Combo
with AM-11 Omnidirectional
Lavalier Microphone



AW-256
Bodypack System
(no microphone)

SPECIFICATIONS

Operating Frequency Range: 682 - 698 MHz (TV 49-51)
Oscillator: PLL synthesized
Reception: Switching diversity
Frequency Stability: +/- 0.005%
System Dynamic Range: >96 dB
Signal to Noise: >94 dB
THD: <1% at 1 KHz

Operating Range: Up to 300 feet
Transmitter Power: 10 mW
Outputs: XLR balanced, 2K Ω
 1/4 inch unbalanced, 600 Ω
Transmitter Batteries: (2) AA, rechargeable or alkaline
Battery Life: up to 6h rechargeable, 8h alkaline
Dimensions (HWD): 1.73 x 8.3 x 7.08 in, (half rack)



© 2008 Ansr Audio, Inc.

3800 HWY 271 North
 Powderly, TX 75473
 phone: 866-491-2677
 fax: 866-746-4366
 email: info@ansraudio.com

www.ansraudio.com