

Section

Public Address

Category

EN 54-24 Loudspeakers

Code

C1000-EN range / C1200-EN

References

Compliant to standards: EN50200

EN54-24:2008 Cert. Nr. 0068/CPR/012-2019



Description

200W EN54 IP55 2-way speaker unit

The **C1200-EN** speaker unit is a weatherproof coaxial two way loudspeaker system offering substantial power and efficiency for a variety of professional indoor or outdoor applications. The low frequency transducer is a 12" woofer with a 2,5" voice coil. The high frequency section is a 1" driver with 1.7" voice coil on conical 80° horn. This speaker unit features a standard 100V line transformer. The cabinet is a single piece rotational moulded in polypropylene, fully UV protected. The C1200-EN model is internal equipped with ceramic terminal block and thermal fuses ensuring the continued operation of loudspeakers in the event of a fire; in addition all connections use flame-retardant cabling which adheres to the EN50200 standard (with IP68 airtight cable glands). The cabinet is equipped with a stainless steel U-bracket. The grille is in custom perforated stainless steel with 3 layers of protection. The C1200-EN meets the requirements of IP55 code (International Protection Rating).


Main features

- 2-way multipurpose 12" coax.
- Sturdy molded polypropylene curved enclosure.
- 12" coaxial woofer with 2.5" coil / 1" HF driver with 1.7" coil.
- Line transformer.
- 4 wires cable to select the power tapping.
- Stainless steel water-stop grille with 3 layers of protection.
- IP55 weather resistant.
- Standard black finish
- Completely manufactured in Italy.

Applications

- Convention center.
- Athletic fields.
- Stadiums.
- Theme parks.
- Swimming pools.
- Cruise ships.
- Malls.
- Ballrooms.
- Outdoor background music.

Technical data

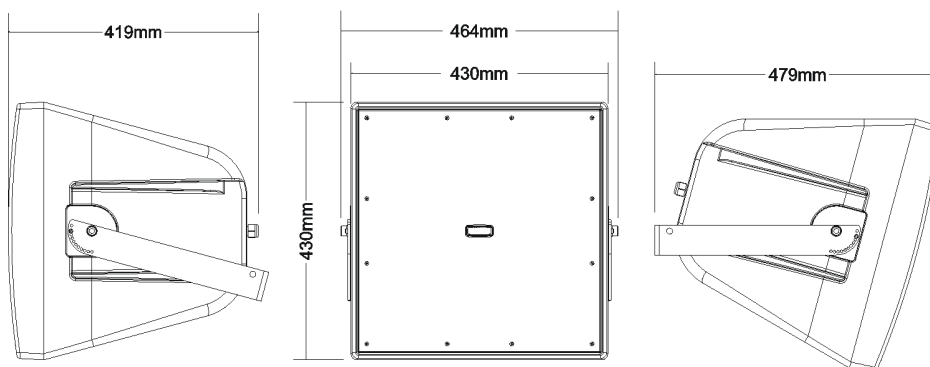

Technical data

C1200-EN



0068

PASO S.p.A Via Settembrini, 34 - 20020 Lainate (MI)

19

0068/CPR/012-2019

EN 54-24

Loudspeaker for voice alarm systems
for fire detection and fire alarm systems for buildings

C1200-EN

Type B

Rated power	200 W
Configuration	2-way
Line transformer (100V)	200 W / 100 W
Rated impedance	8 Ω
Frequency response @ -6dB	68 ÷ 20.000 Hz
Efficiency @ 1W/1m	97,5 dB
Maximum SPL @ 1m/4m	120 dB / 108 dB
Horizontal dispersion angle (-6dB)	500 Hz: 100° 1 kHz: 90° 2 kHz: 80° 4 kHz: 50°
Vertical dispersion angle (-6dB)	500 Hz: 100° 1 kHz: 90° 2 kHz: 80° 4 kHz: 50°
Recommended HP filter	50 Hz / 24 dBoct
Input connectors	4-wire cable
Colours	Black
Protection degrees	IP55
Dimensions	430 x 430 x 400 mm
Net weight	15 kg

Technical data

